

CS162
Operating Systems and
Systems Programming
Lecture 16
Layering

October 30, 2013

Anthony D. Joseph and John Canny

<http://inst.eecs.berkeley.edu/~cs162>

Goals for Today

- Networking Concepts and Functionalities
- Properties of Layers
- Five IP Networking Layers:
 - Physical, Datalink, Network, Transport, and Application
- Drawbacks of Layering

Note: Some slides and/or pictures in the following are adapted from slides ©2005 Silberschatz, Galvin, and Gagne. Slides courtesy of Anthony D. Joseph, John Kubiawicz, AJ Shankar, George Necula, Alex Aiken, Eric Brewer, Ras Bodik, Ion Stoica, Doug Tygar, and David Wagner.

Why is Networking Important?

- Virtually all apps you use communicate over network
 - Many times main functionality is implemented remotely (e.g., Google services, Amazon, Facebook, Twitter, ...)
- Thus, connectivity is key service provided by an OS
 - Many times, connectivity issues → among top complaints
- Q: What is a “Facation”?
- A: Taking a break from Facebook




Why is Networking Important?

- Virtually all apps you use communicate over network
 - Many times main functionality is implemented remotely (e.g., Google services, Amazon, Facebook, Twitter, ...)
- Thus, connectivity is key service provided by an OS
 - Many times, connectivity issues → among top complaints
- Some of the hottest opportunities in the OS space:
 - Optimize OS for network boxes (e.g., intrusion detection, firewalls)
 - OSes for Software Defined Networks (SDNs)


Network Concepts

- **Network (interface) card/controller:** hardware that physically connects a computer to the network
- A computer can have more than one networking cards
 - E.g., one card for wired network, and one for wireless network

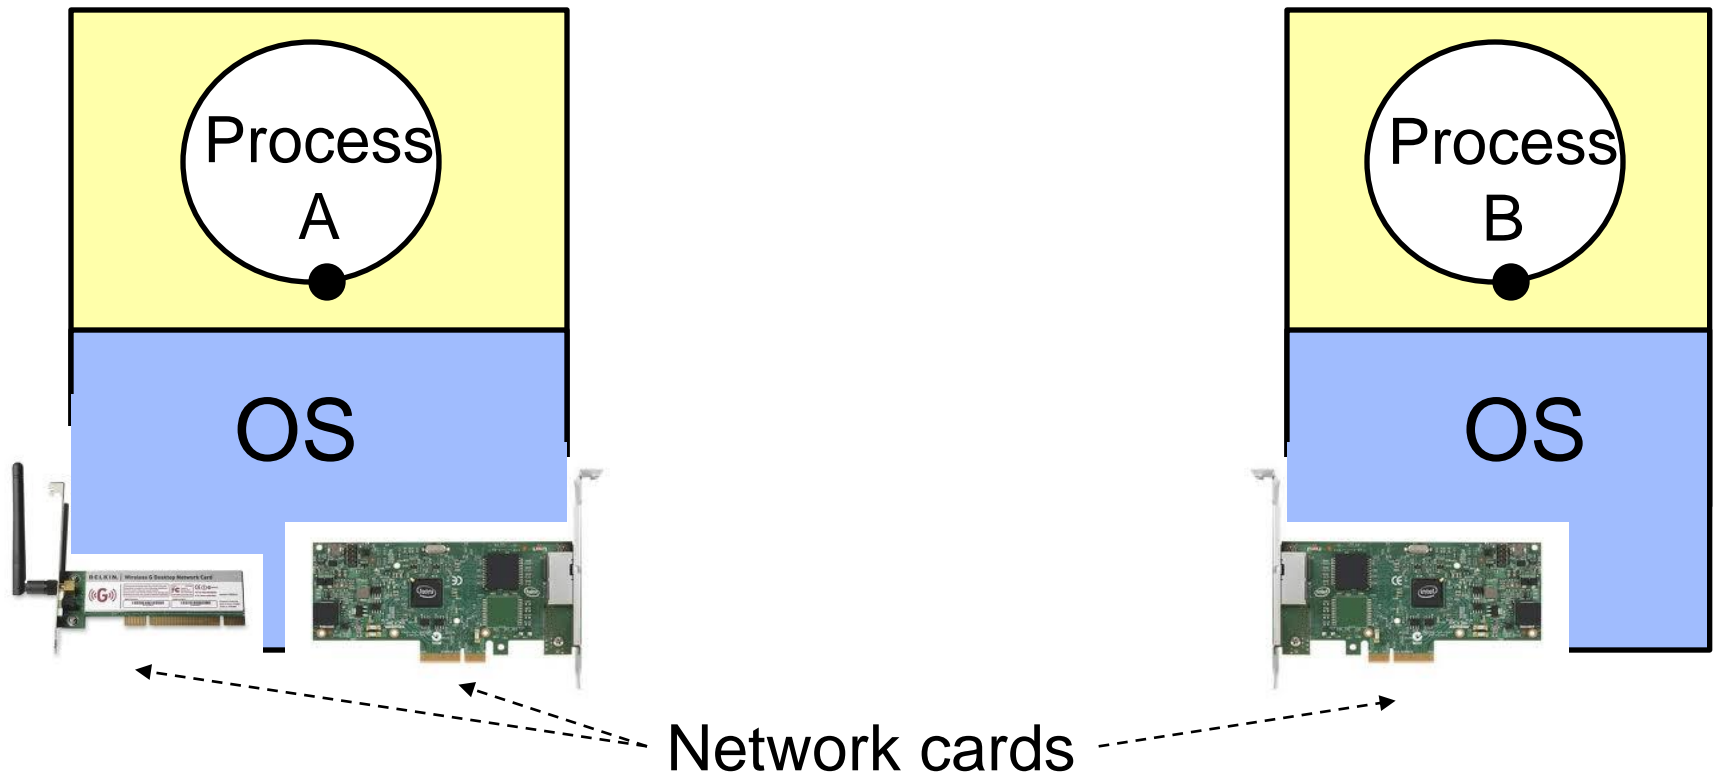


Network Concepts (cont'd)

- Typically, each network card is associated two addresses:
 - Media Access Control (MAC), or physical, address
 - IP (network) address; can be shared by network cards on same host

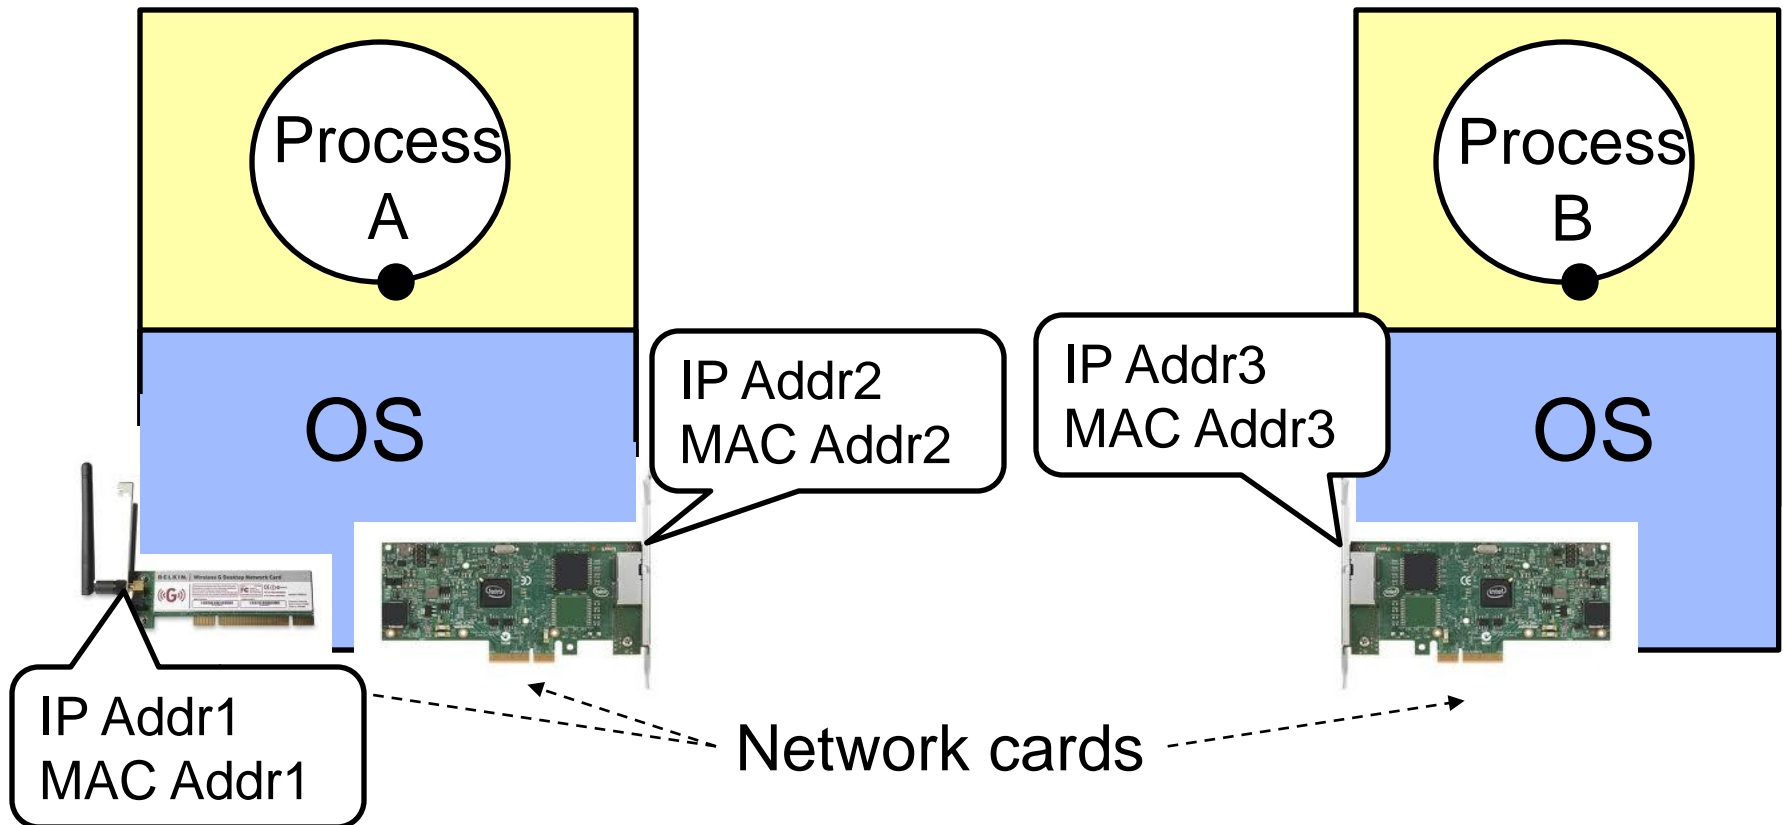


Network Concepts (cont'd)

- **MAC address:** 48-bit unique identifier assigned by card vendor
- **IP Address:** 32-bit (or 128-bit for IPv6) address assigned by network administrator or dynamically when computer connects to network

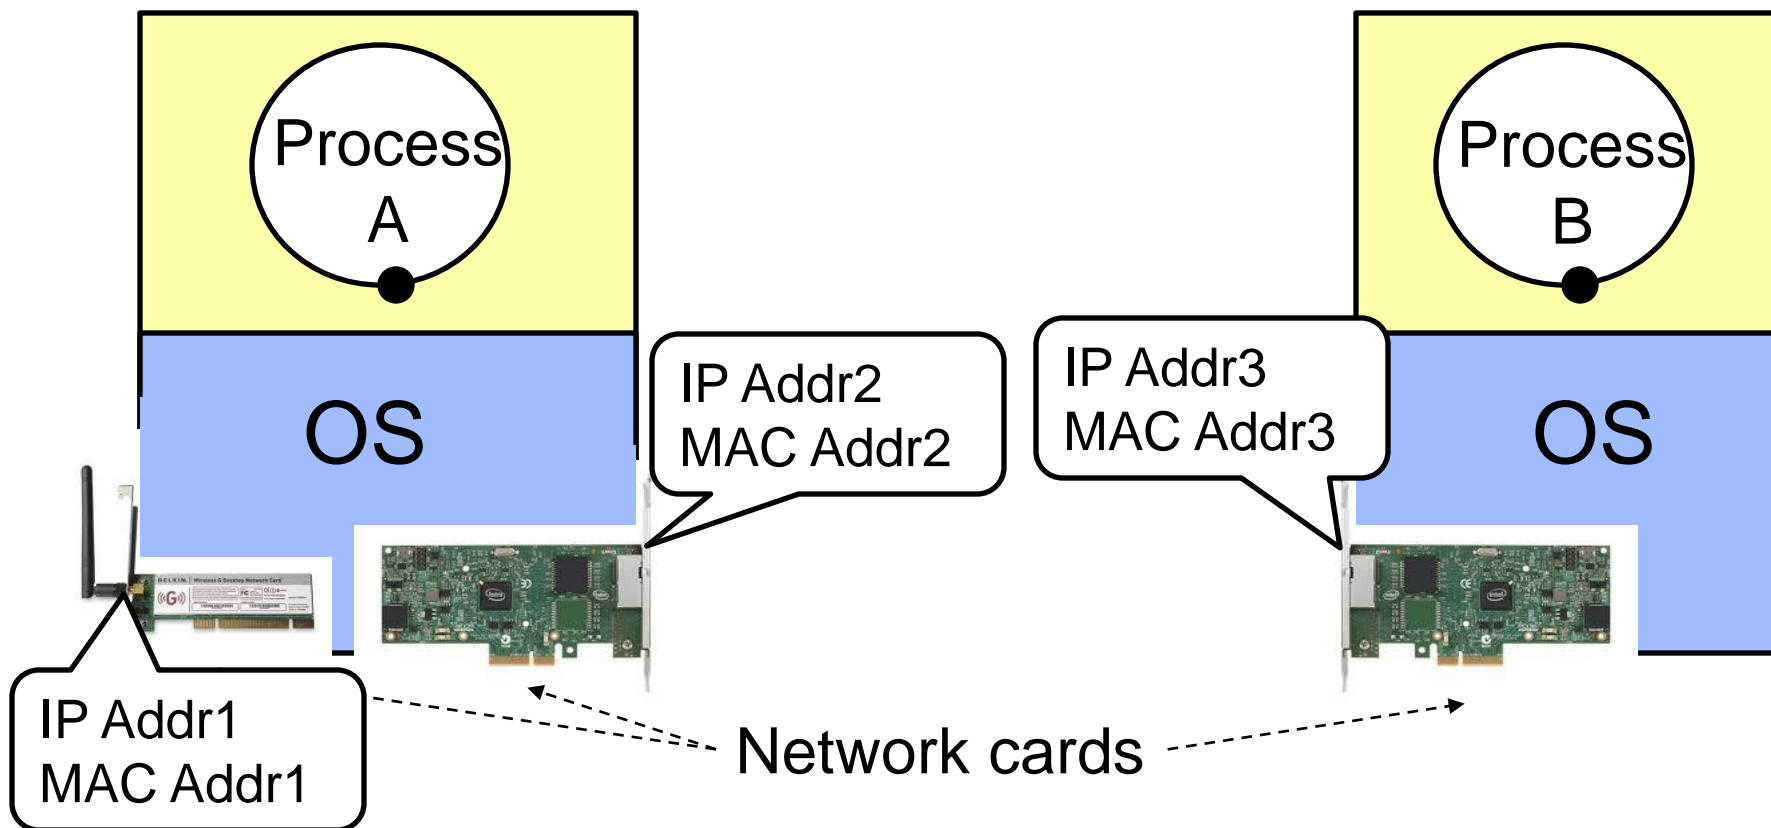

Network Concepts (cont'd)

- **Connection:** communication channel between two processes
- Each endpoint is identified by a **port number**
 - **Port number:** 16-bit identifier assigned by app or OS
 - Globally, an endpoint is identified by (IP address, port number)

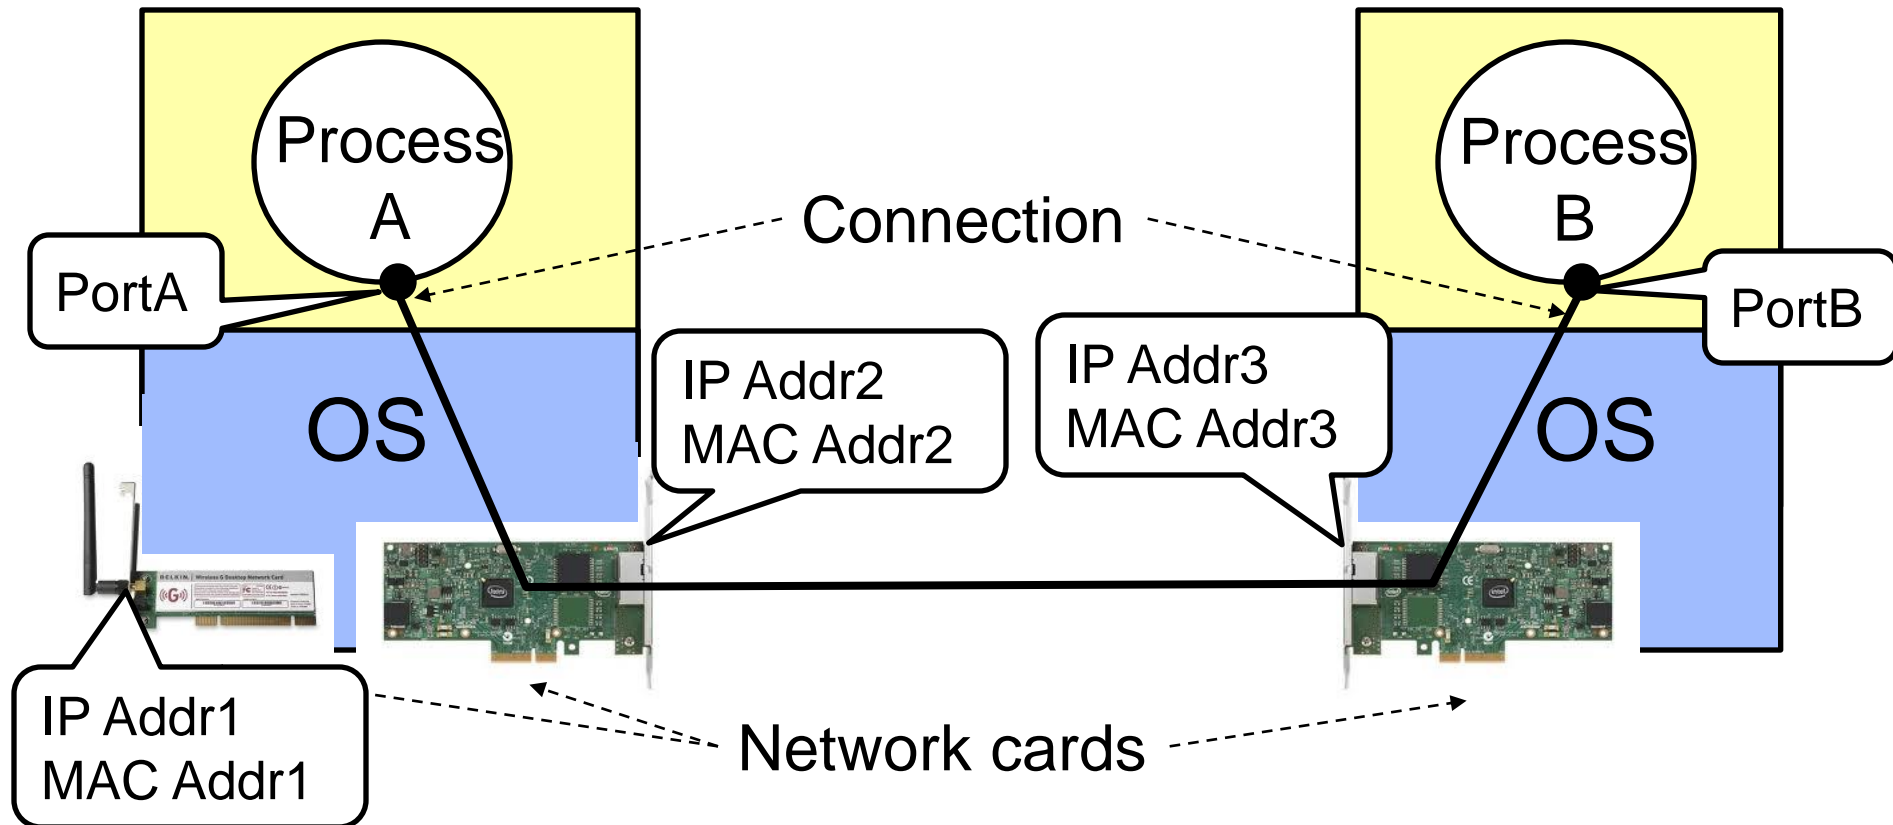

Common Port Numbers

Application	Port number
Wake-on-LAN	9
FTP data	20
FTP control	21
SSH	22
Telnet	23
DNS	53
HTTP	80
SNMP	161
...	...

Main Network Functionalities

- **Delivery:** deliver packets between to any host in the Internet
 - E.g., deliver a packet from a host in Berkeley to a host in Tokyo?
- **Reliability:** tolerate packet losses
 - E.g., how do you ensure all bits of a file are delivered in the presence of packet losses?
- **Flow control:** avoid overflowing the receiver buffer
 - Recall our bounded buffer example: stop sender from overflowing buffer
 - E.g., how do you ensure that a server that can send at 10Gbps doesn't overwhelm a LTE phone?
- **Congestion control:** avoid overflowing the buffer of a router along the path
 - What happens if we don't do it?

Review: Layering


- Partition the system
 - Each layer **solely** relies on services from layer below
 - Each layer **solely** exports services to layer above
- Interface between layers defines interaction
 - Hides implementation details
 - Layers can change without disturbing other layers

Properties of Layers

- **Service:** **what** a layer does
- **Service interface:** **how** to **access** the service
 - Interface for layer above
- **Protocol** (*peer interface*): **how** peers communicate to achieve the service
 - Set of rules and formats that specify the communication between network elements
 - Does ***not*** specify the implementation on a single machine, but how the layer is implemented ***between*** machines

OSI Layering Model


- Open Systems Interconnection (OSI) model
 - Developed by International Organization for Standardization (ISO) in 1984
 - **Seven** layers
- Internet Protocol (IP)
 - Only **five** layers
 - The functionalities of the missing layers (i.e., Presentation and Session) are provided by the Application layer

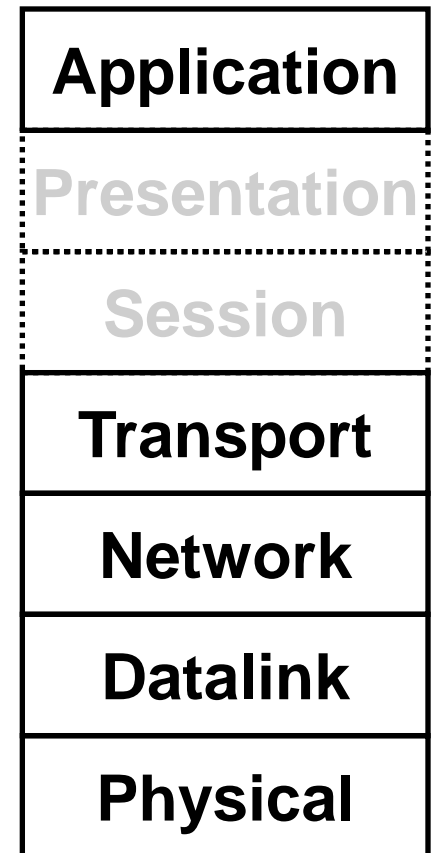

Physical Layer (1)

- **Service:** move information between two systems connected by a physical link
- **Interface:** specifies how to send and receive bits
- **Protocol:** **coding scheme** used to represent a bit, voltage levels, duration of a bit
- Examples: coaxial cable, optical fiber links; transmitters, receivers

Application
Present.
Session
Transport
Network
Datalink
Physical

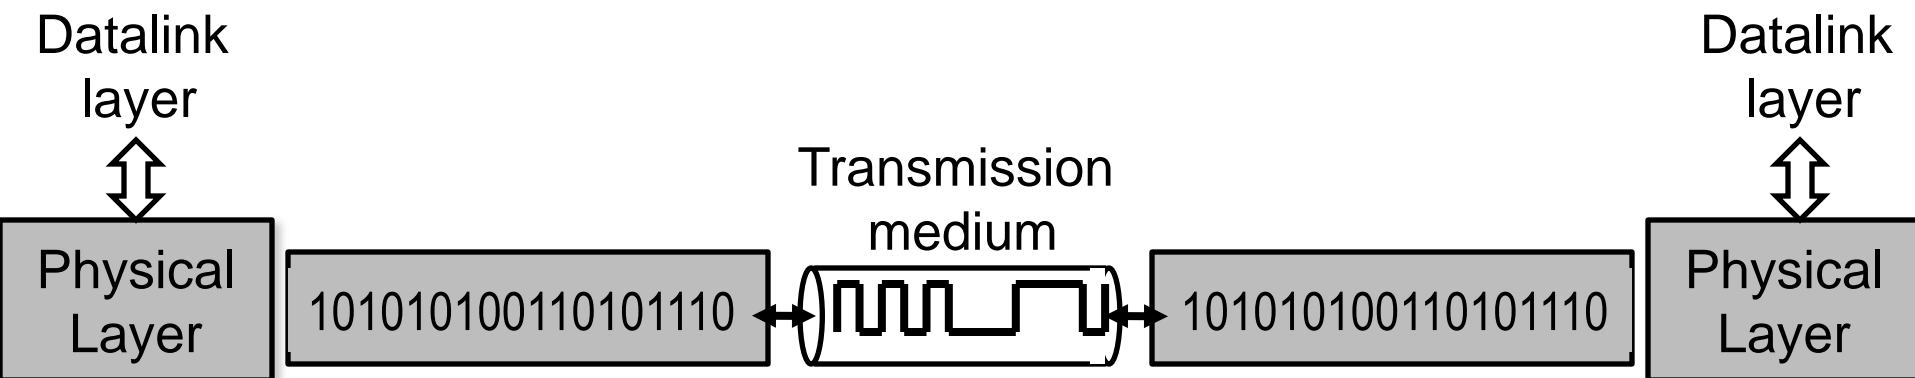

Datalink Layer (2)


Application
Present.
Session
Transport
Network
Datalink
Physical

- **Service:**
 - Enable end hosts to exchange frames (atomic messages) on the same physical line or wireless link
 - Possible other services:
 - » **Arbitrate access** to common physical media
 - » May provide **reliable transmission**, **flow control**
- **Interface:** send *frames* to other end *hosts*; receive *frames* addressed to end host
- **Protocols:** addressing, Media Access Control (MAC) (e.g., CSMA/CD - *Carrier Sense Multiple Access / Collision Detection*)

Datalink Layer (2)

Application
Present.
Session
Transport
Network
Datalink
Physical

- Each frame has a header which contains a source and a destination MAC address
- MAC (Media Access Control) address
 - Uniquely identifies a network interface
 - 48-bit, assigned by the device manufacturer

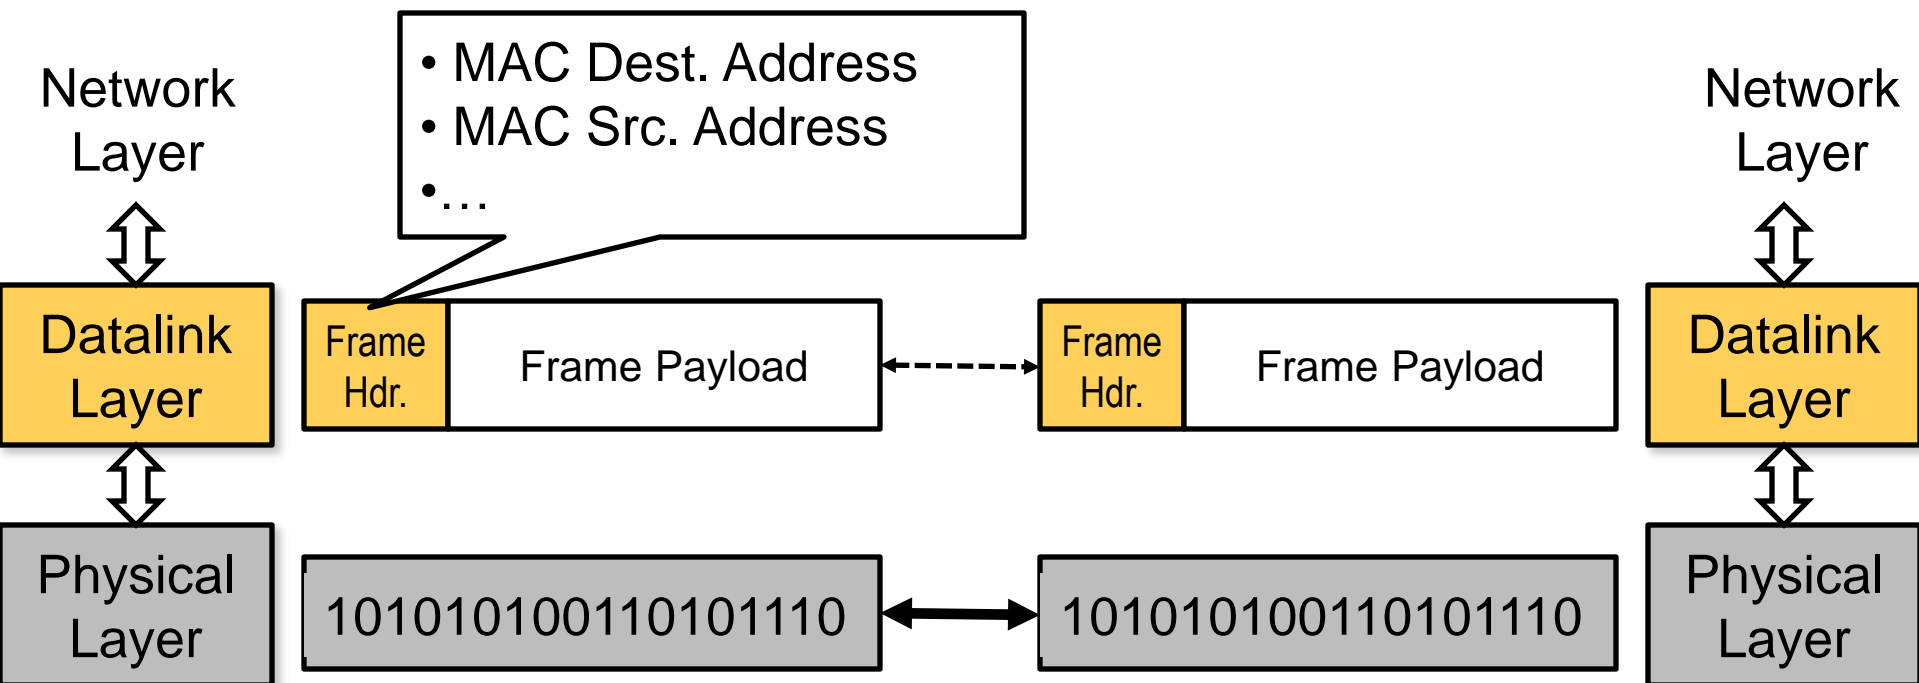

MAC Address Examples

Application
Present.
Session
Transport
Network
Datalink

- Can easily find MAC addr. on your machine/device:
 - E.g., ifconfig (Linux, Mac OS X), ipconfig (Windows)

The image displays two screenshots side-by-side. On the left is a Mac OS X 'About' window, showing system information. The 'Wi-Fi Address' is highlighted with a blue box and shows the value 00:1E:C2:CE:12:C4. On the right is a Windows command prompt window titled 'C:\Windows\system32\cmd.exe'. It shows the output of the 'ipconfig' command. The 'Wireless LAN adapter Wireless Network' section is highlighted, and its 'Physical Address' is 00-13-00-E1-11-11, which is boxed in yellow. A yellow arrow points from a label 'Wi-Fi MAC address' to this address. Below it, the 'Ethernet adapter Local Area Connection' section is also highlighted, and its 'Physical Address' is 00-00-00-1A-1F-25, which is also boxed in yellow. A yellow arrow points from a label 'Wired/Ethernet MAC address' to this address.

Mac OS X About window (Wi-Fi Address):

Photos	2
Capacity	14.6 GB
Available	14.4 GB
Version	2.0.2 (5C1)
Serial Number	8881345K0KH
Model	MB384LL
Wi-Fi Address	00:1E:C2:CE:12:C4
Bluetooth	00:1E:C2:CE:12:C3
IMEI	01 143400 134807 5
ICCID	8901 4103 2119 5323 8759

Windows Command Prompt (ipconfig output):

```
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No
DNS Suffix Search List. . . . : stanford.edu
                                it.win.stanford.edu
                                ...

Wireless LAN adapter Wireless Network:
    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix . : Stanford.EDU
    Description . . . . . : Intel(R) Wireless WiFi Link 4965AO
    Physical Address. . . . . : 00-13-00-E1-11-11
    DHCP Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . : Yes

Ethernet adapter Local Area Connection:
    Connection-specific DNS Suffix . : 
    Description . . . . . : Intel(R) 82566MM Gigabit Network Controller
    Physical Address. . . . . : 00-00-00-1A-1F-25
    DHCP Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . : Yes
    Link-local IPv6 Address . . . . . : fe80::5555:7a09:6ed7:5e45%8 (Preferred)
    IPv4 Address. . . . . : 171.64.22.222 (Preferred)
    Subnet Mask . . . . . : 255.255.255.0
    Lease Obtained. . . . . : Thursday, March 06, 2008 4:26:20 PM
    Lease Expires . . . . . : Saturday, March 08, 2008 4:26:20 PM
    Default Gateway . . . . . : 171.64.26.1
    DHCP Server . . . . . : 171.64.7.89
    DHCPv6 IAID . . . . . : 184556581
    DNS Servers . . . . . : 171.64.7.77
                                171.64.7.99
```

Local Area Networks (LANs)

Application
Present.
Session
Transport
Network
Datalink
Physical

- LAN: group of hosts/devices that
 - are in the same geographical proximity (e.g., same building, room)
 - use same physical communication technology
- Examples:
 - all laptops connected wirelessly at a Starbucks café
 - all devices and computers at home
 - all hosts connected to wired Ethernet in an office




Ethernet cable and port

LANs

Application
Present.
Session
Transport
Network
Datalink
Physical


- All hosts in a LAN can share same physical communication media
 - Also called, broadcast channel
- Each frame is delivered to every host
 - “Hubs” forward from one wire to all the others
- If a host is not the intended recipient, it drops the frame

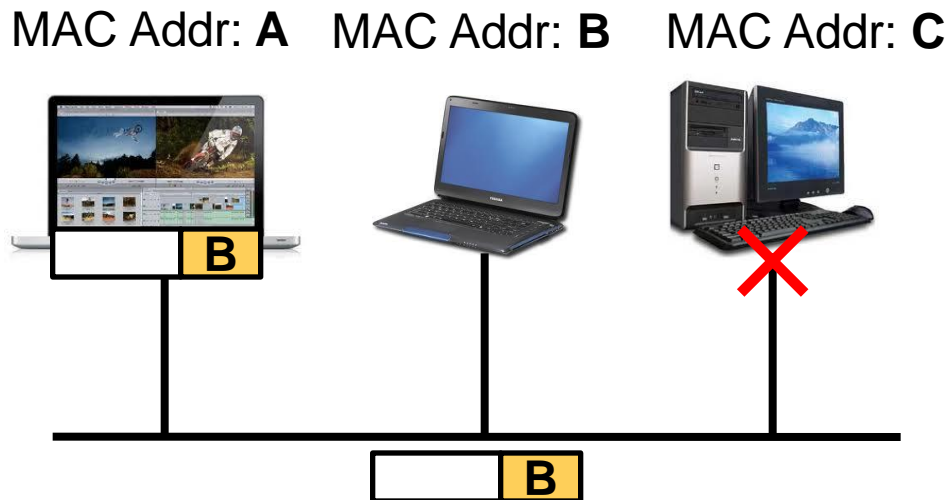

Switches

- Hosts in same LAN can be also connected by switches
- A switch forwards frames only to intended recipients
 - Far more efficient than broadcast channel

Application
Present.
Session
Transport
Network
Datalink
Physical

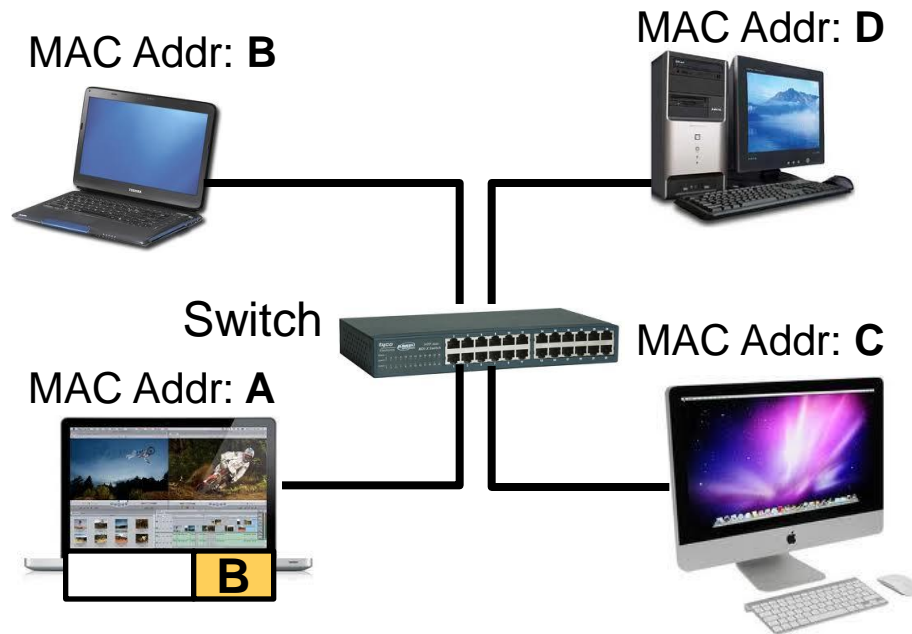

Media Access Control (MAC) Protocols

Application
Present.
Session
Transport
Network
Datalink
Physical

- Problem:
 - How do hosts access a broadcast media?
 - How do they avoid collisions?
- Three solutions:
 - Channel partition
 - “Taking turns”
 - Random access

MAC Protocols

Application
Present.
Session
Transport
Network
Datalink
Physical

- **Channel partitioning protocols:**
 - Allocate $1/N$ bandwidth to every host
 - Share channel efficiently and fairly at high load
 - **Inefficient at low load** (where load = # senders):
 - » $1/N$ bandwidth allocated even if only 1 active node!
 - E.g., Frequency Division Multiple Access (FDMA); optical networks
- **“Taking turns” protocols:**
 - Pass a token around active hosts
 - A host can only send data if it has the token
 - More efficient at low loads: single node can use $\gg 1/N$ bandwidth
 - Overhead in acquiring the token
 - **Vulnerable to failures** (e.g., failed node or lost token)
 - E.g., Token ring

MAC Protocols

Application
Present.
Session
Transport
Network
Datalink
Physical

- **Random Access**
 - Efficient at low load: single node can fully utilize channel
 - High load: collision overhead
- Key ideas of random access:
 - **Carrier sense (CS)**
 - » *Listen before speaking, and don't interrupt*
 - » Checking if someone else is already sending data
 - » ... and waiting till the other node is done
 - **Collision detection (CD)**
 - » *If someone else starts talking at the same time, stop*
 - » Realizing when two nodes are transmitting at once
 - » ...by detecting that the data on the wire is garbled
 - **Randomness**
 - » *Don't start talking again right away*
 - » Waiting for a random time before trying again
 - Examples: CSMA/CD, Ethernet, best known implementation


Administrivia

- Project 2 code due **11:59pm on Thursday** 10/31.
- Project 2 group evals due **11:59pm on Friday** 11/1.

Watch slip days! Remember there are only 4 of these, after that there is an automatic (non-negotiable) 10% deduction for each day late. Projects 3 and 4 are challenging!

CS 162 Collaboration Policy

 Discussing algorithms/testing strategies with other groups
Helping debug someone else's code (in another group)

 Sharing code or test cases with another group
Copying OR reading another group's code or test cases
Copying OR reading online code or test cases from prior years

We are comparing all project submissions against all submissions from several prior years and will take action against offenders

5min Break

Quiz 16.1: Layering

- Q1: True _ False _ Protocols specify the implementation
- Q2: True _ False _ Congestion control takes care of the sender not overflowing the receiver
- Q3: True _ False _ A random access protocol is efficient at low utilization
- Q4: True _ False _ At the data link layer, hosts are identified by IP addresses
- Q5: True _ False _ The physical layer is concerned with sending and receiving bits

Quiz 16.1: Layering

- Q1: True ☐ False ☒ Protocols specify the implementation
- Q2: True ☐ False ☒ Congestion control takes care of the sender not overflowing the receiver
- Q3: True ☒ False ☐ A random access protocol is efficient at low utilization
- Q4: True ☐ False ☒ At the data link layer, hosts are identified by IP addresses
- Q5: True ☒ False ☐ The physical layer is concerned with sending and receiving bits

(Inter) Network Layer (3)


Application
Present.
Session
Transport
Network
Datalink
Physical

- **Service:**
 - Deliver packets to specified **network (IP) addresses** across multiple datalink layer networks
 - Possible other services:
 - » Packet *scheduling/priority*
 - » Buffer management
- **Interface:** send *packets* to specified network address destination; receive packets destined for end host
- **Protocols:** define network addresses (globally unique); construct forwarding tables; packet forwarding

(Inter) Network Layer (3)

- **IP address:** unique addr. assigned to network device
- Assigned by network administrator or dynamically when host connects to network


Application
Present.
Session
Transport
Network
Datalink
Physical

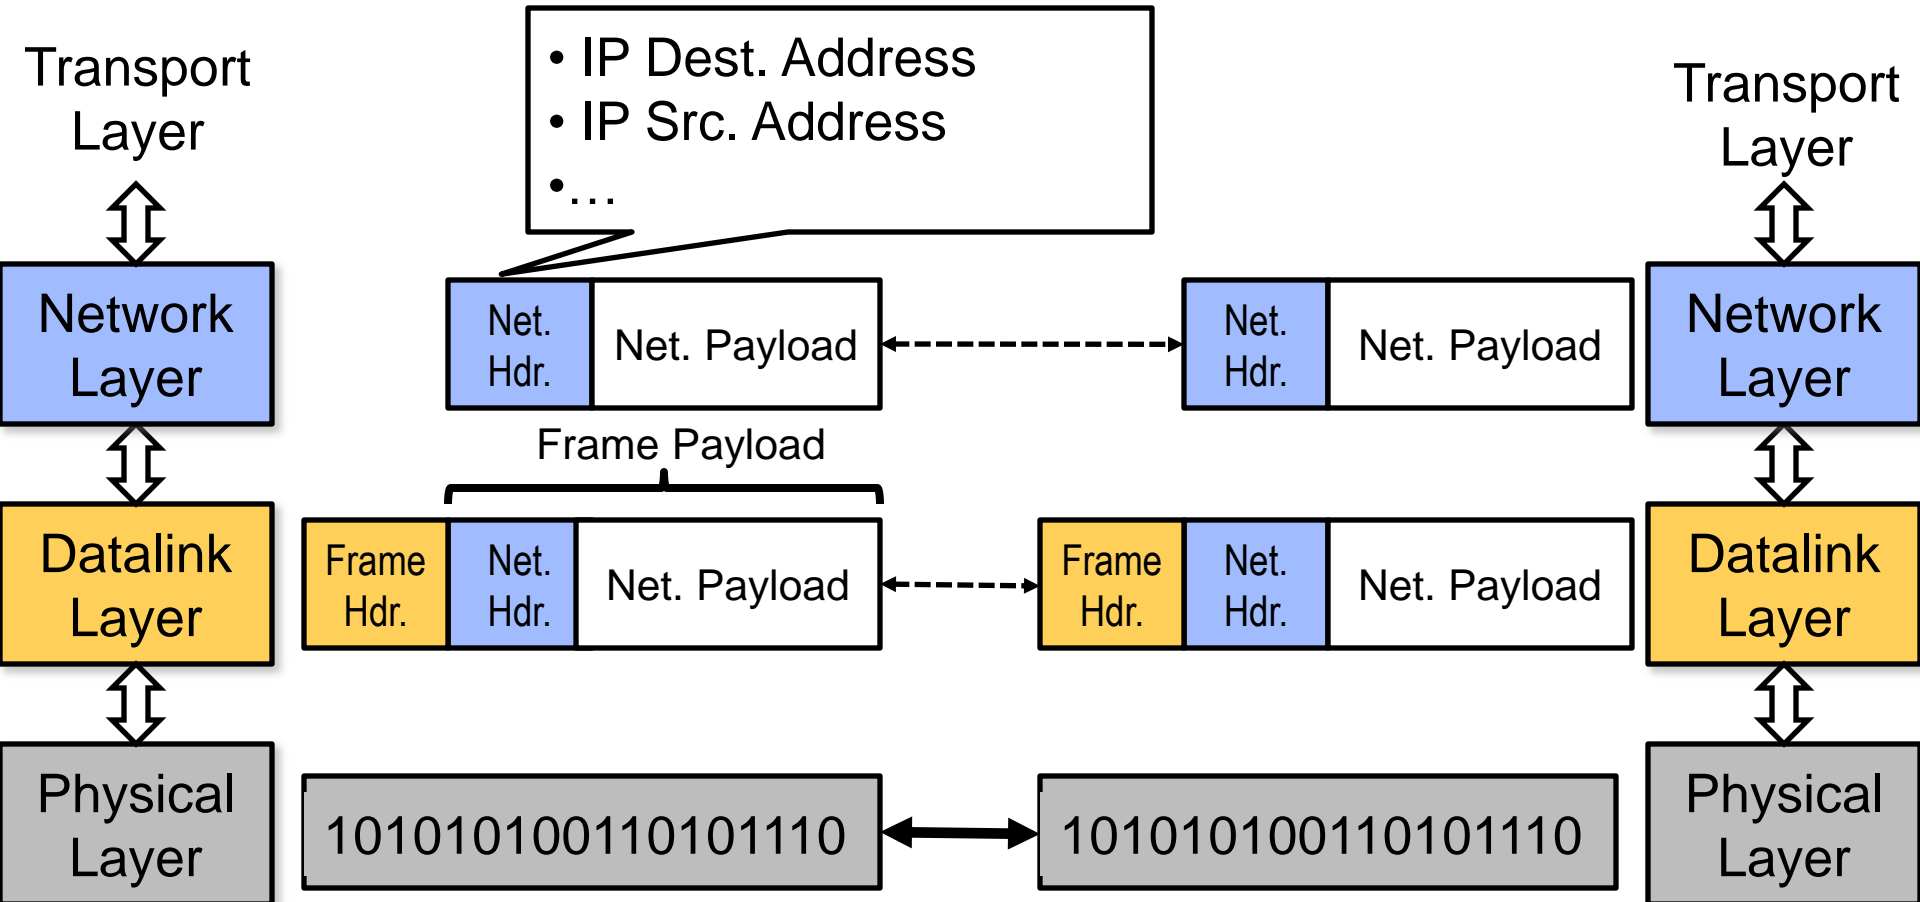

Wide Area Network


Application
Present.
Session
Transport
Network
Datalink
Physical

- **Wide Area Network (WAN)**: network that covers a broad area (e.g., city, state, country, entire world)
 - E.g., Internet is a WAN
- WAN connects multiple datalink layer networks (LANs)
- Datalink layer networks are connected by **routers**
 - Different LANs can use different communication technologies (e.g., wireless, cellular, optics, wired)

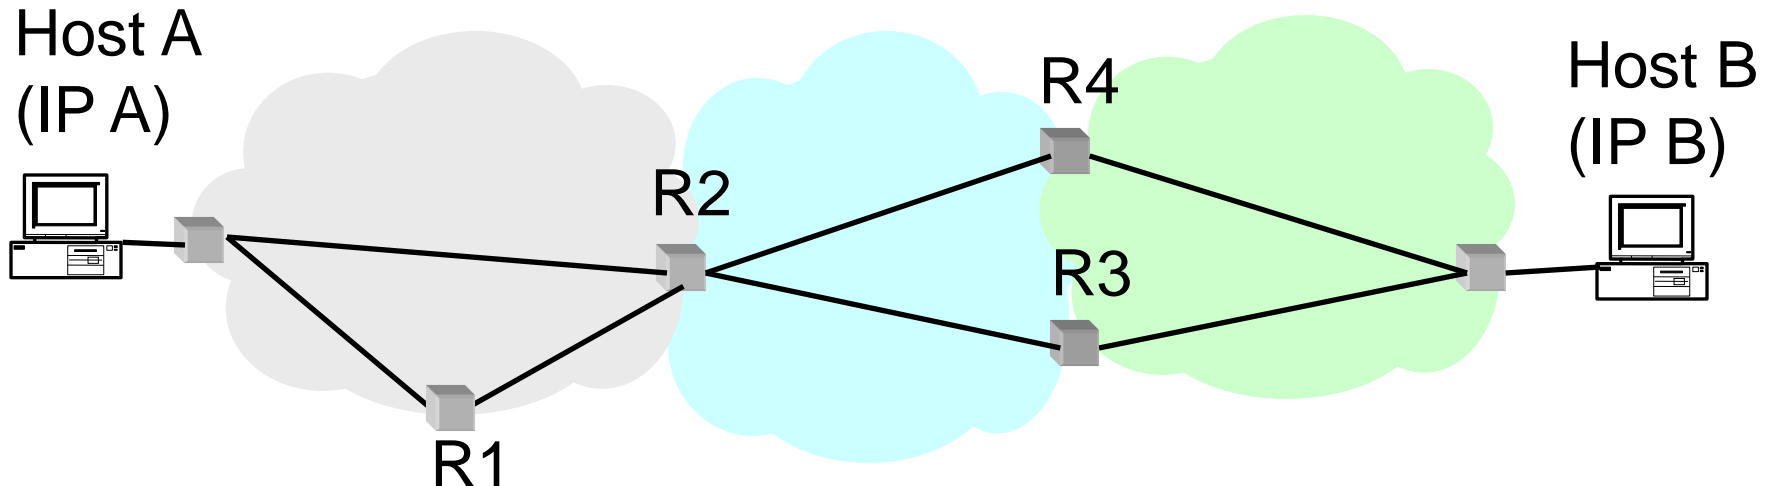

Routers


- **Forward** each packet received on an **incoming link** to an **outgoing link** based on packet's destination IP address (towards its destination)
- **Store & forward**: packets are buffered before being forwarded
- **Forwarding table**: mapping between IP address and the output link

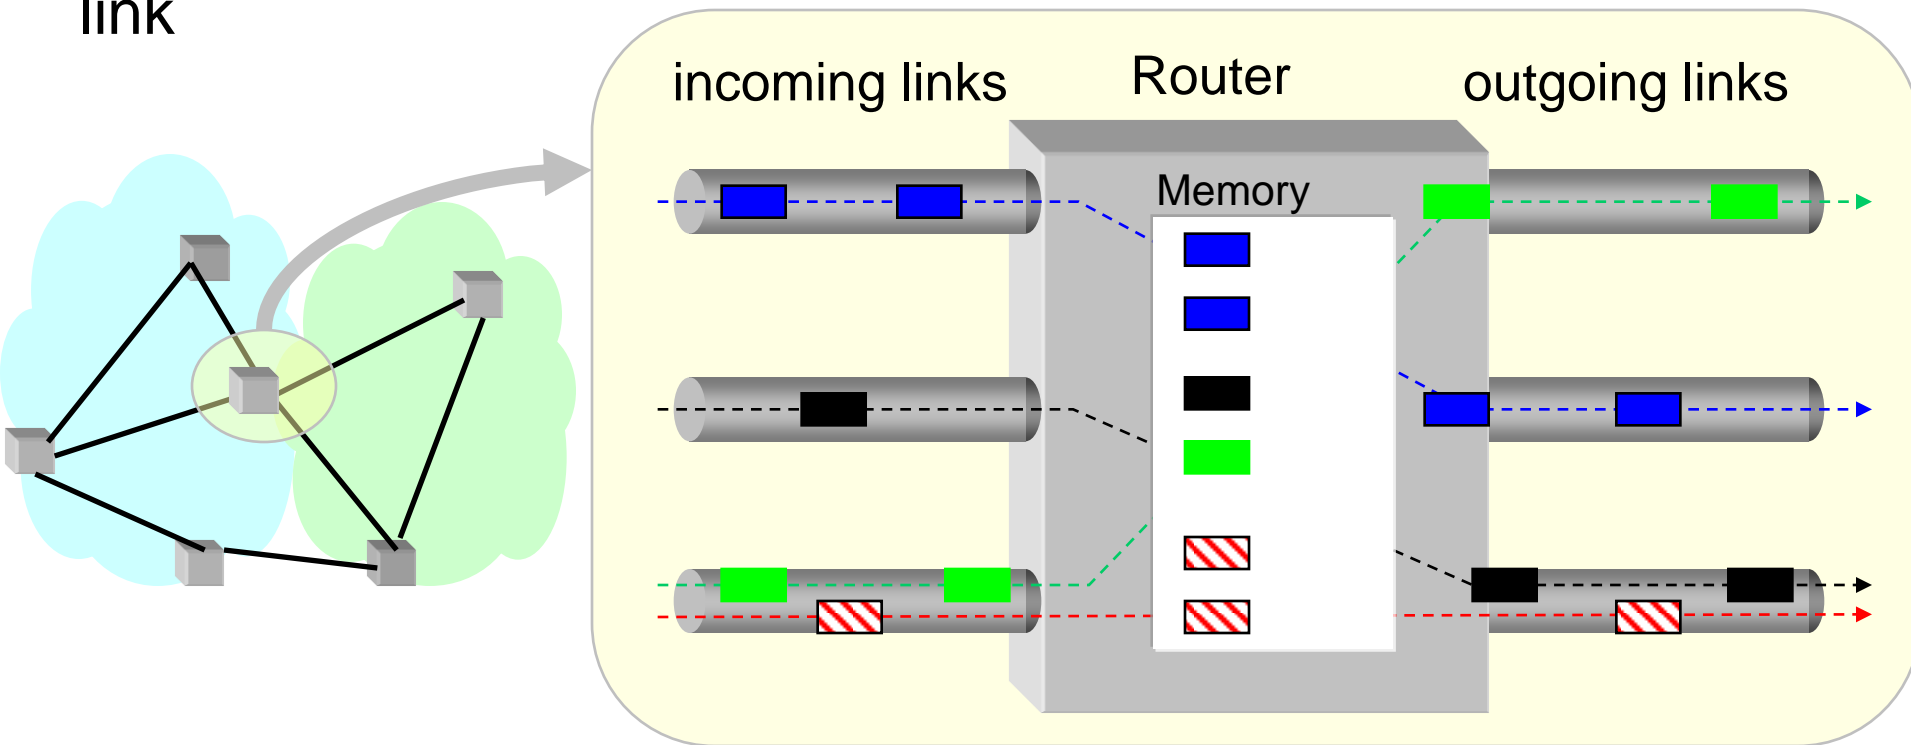

Packet Forwarding

Application
Present.
Session
Transport
Network
Datalink
Physical

- Upon receiving a packet, a router
 - read the IP destination address of the packet
 - consults its forwarding table → output port
 - forwards packet to corresponding output port

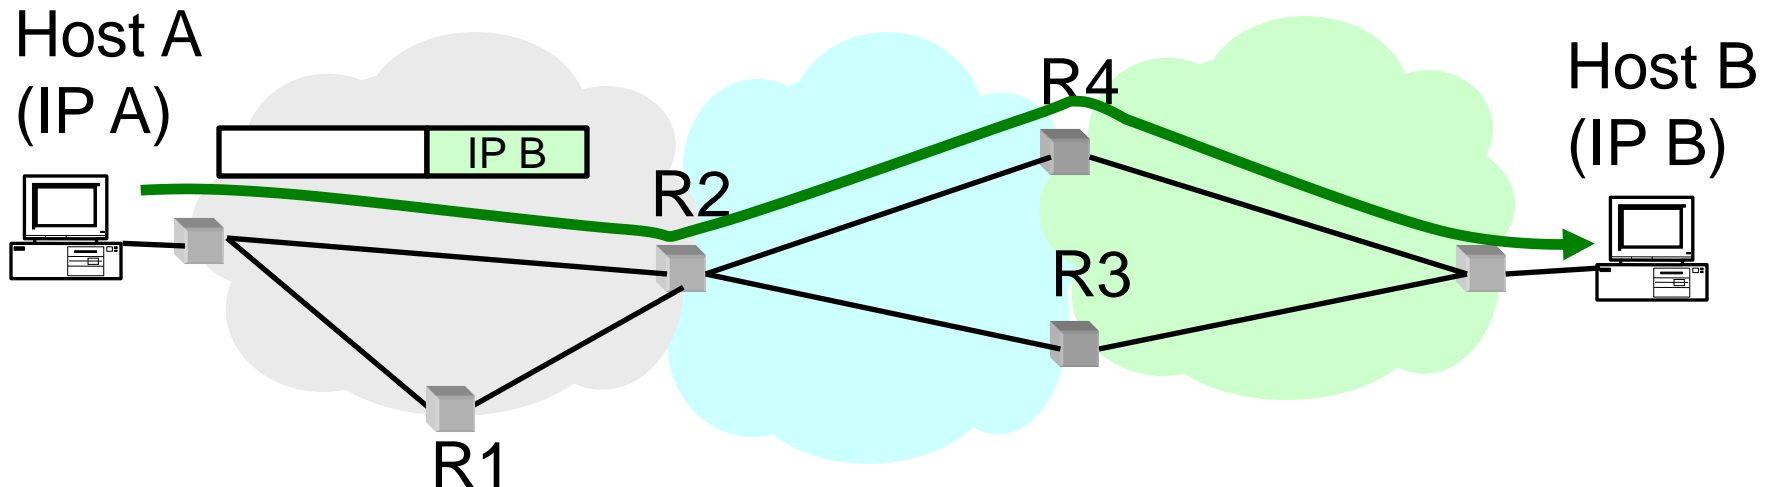

IP Addresses vs. MAC Addresses

Application
Present.
Session
Transport
Network
Datalink
Physical

- Why not use MAC addresses for routing?
 - Doesn't scale
- Analogy
 - MAC address → SSN
 - IP address → (unreadable) home address
- MAC address: uniquely associated to the device for the entire lifetime of the device
- IP address: changes as the device location changes
 - Your notebook IP address at school is different from home



1051 Euclid Ave
Berkeley, CA 94722



10 7th Street NW
Washington, DC 21115

IP Addresses vs. MAC Addresses


Application
Present.
Session
Transport
Network
Datalink
Physical

- Why does packet forwarding using IP addr. scale?
- Because IP addresses can be aggregated
 - E.g., all IP addresses at UC Berkeley start with **0xA9E5**, i.e., any address of form 0xA9E5**** belongs to Berkeley
 - Thus, a router in NY needs to keep a **single** entry for **all** hosts at Berkeley
 - If we were using MAC addresses the NY router would need to maintain **an entry for every** Berkeley host!!



- Analogy:
 - Give this letter to person with SSN: 123-45-6789 vs.
 - Give this letter to “John Smith, 123 First Street, LA, US”

Mapping the Internet

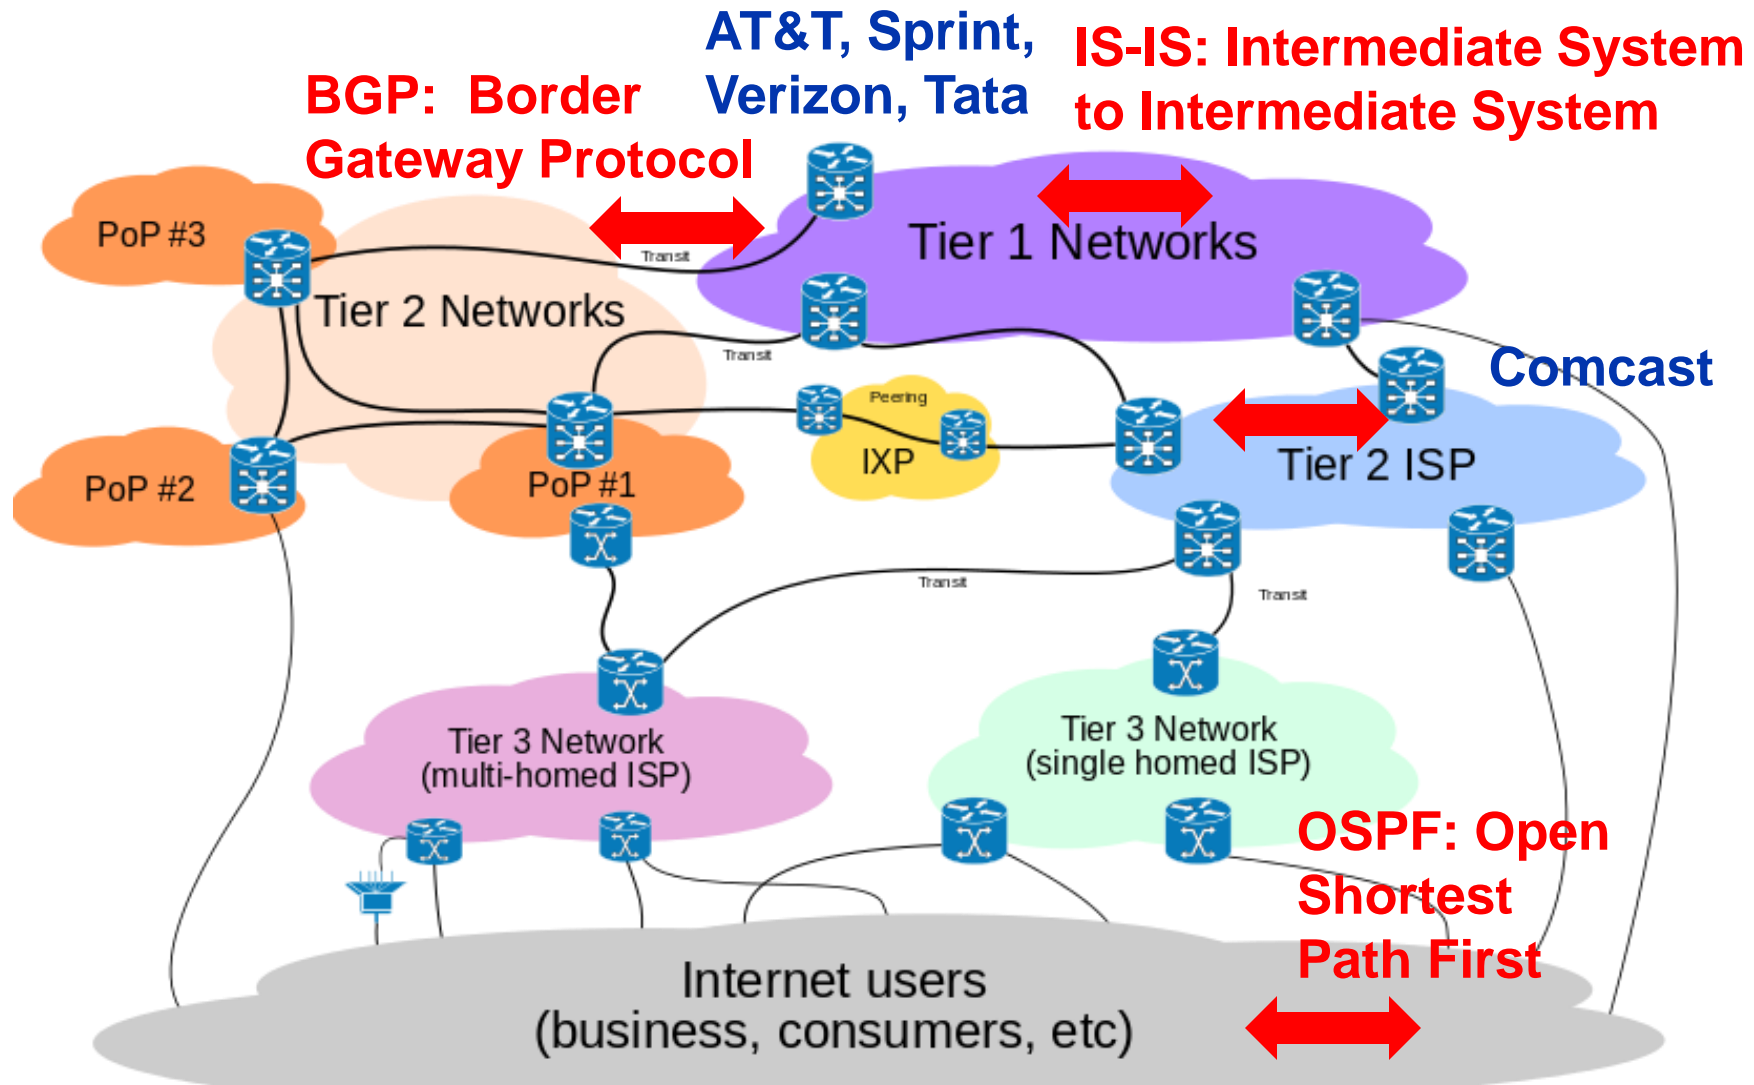

Source: Wikipedia: Internet Connectivity Distribution & Core.svg

Networking Standards


“The nice thing about standards is that there are so many to choose from”

- Andrew Tanenbaum

Application
Present.
Session
Transport
Network
Datalink
Physical

The Internet Protocol (IP)

- Internet Protocol: Internet's network layer
- Service it provides: “Best-Effort” Packet Delivery
 - Tries it's “best” to deliver packet to its destination
 - Packets may be lost
 - Packets may be corrupted
 - Packets may be delivered out of order

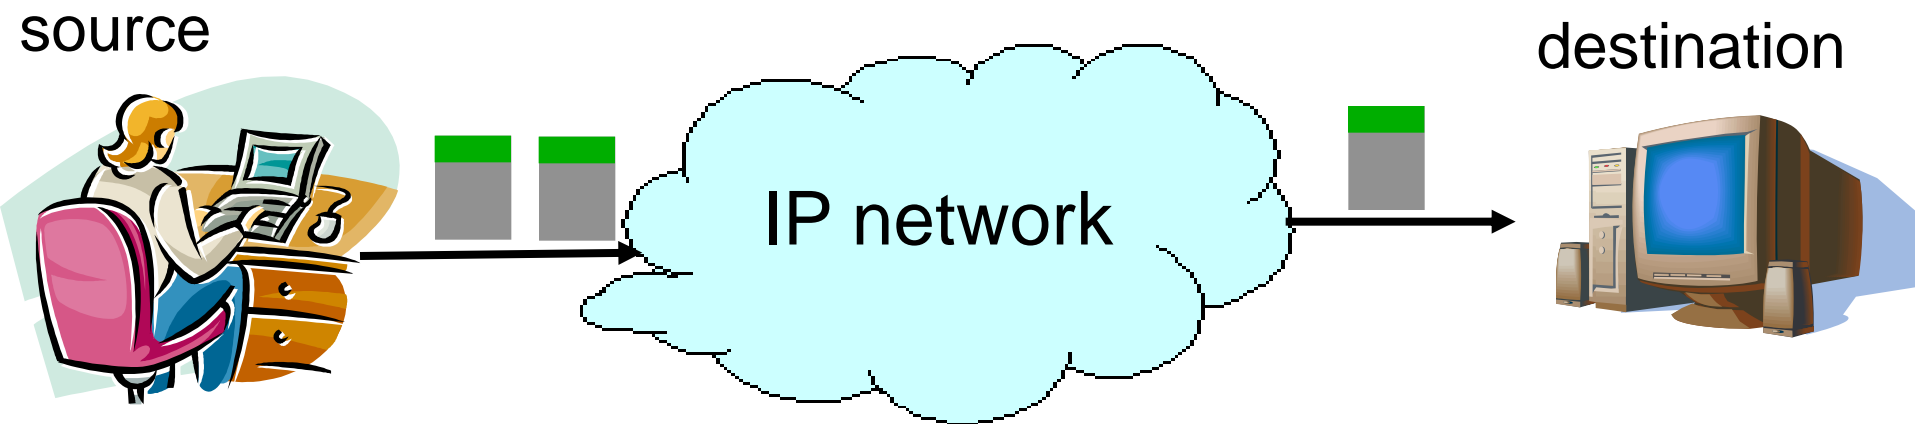



Transport Layer (4)

Application
Present. Session
Transport
Network
Datalink
Physical

- **Service:**
 - Provide end-to-end communication between **processes**
 - **Demultiplexing** of communication between hosts
 - Possible other services:
 - » **Reliability** in the presence of errors
 - » **Timing** properties
 - » **Rate adaption** (flow-control, congestion control)
- **Interface:** send message to specific process at given destination; local process receives messages sent to it
- **Protocol:** port numbers, perhaps implement reliability, flow control, packetization of large messages, framing
- Examples: TCP and UDP

Port Numbers

- Port number: 16-bit number identifying the endpoint of a transport connection
 - E.g., 80 identifies the port on which a processing implementing HTTP server can be connected

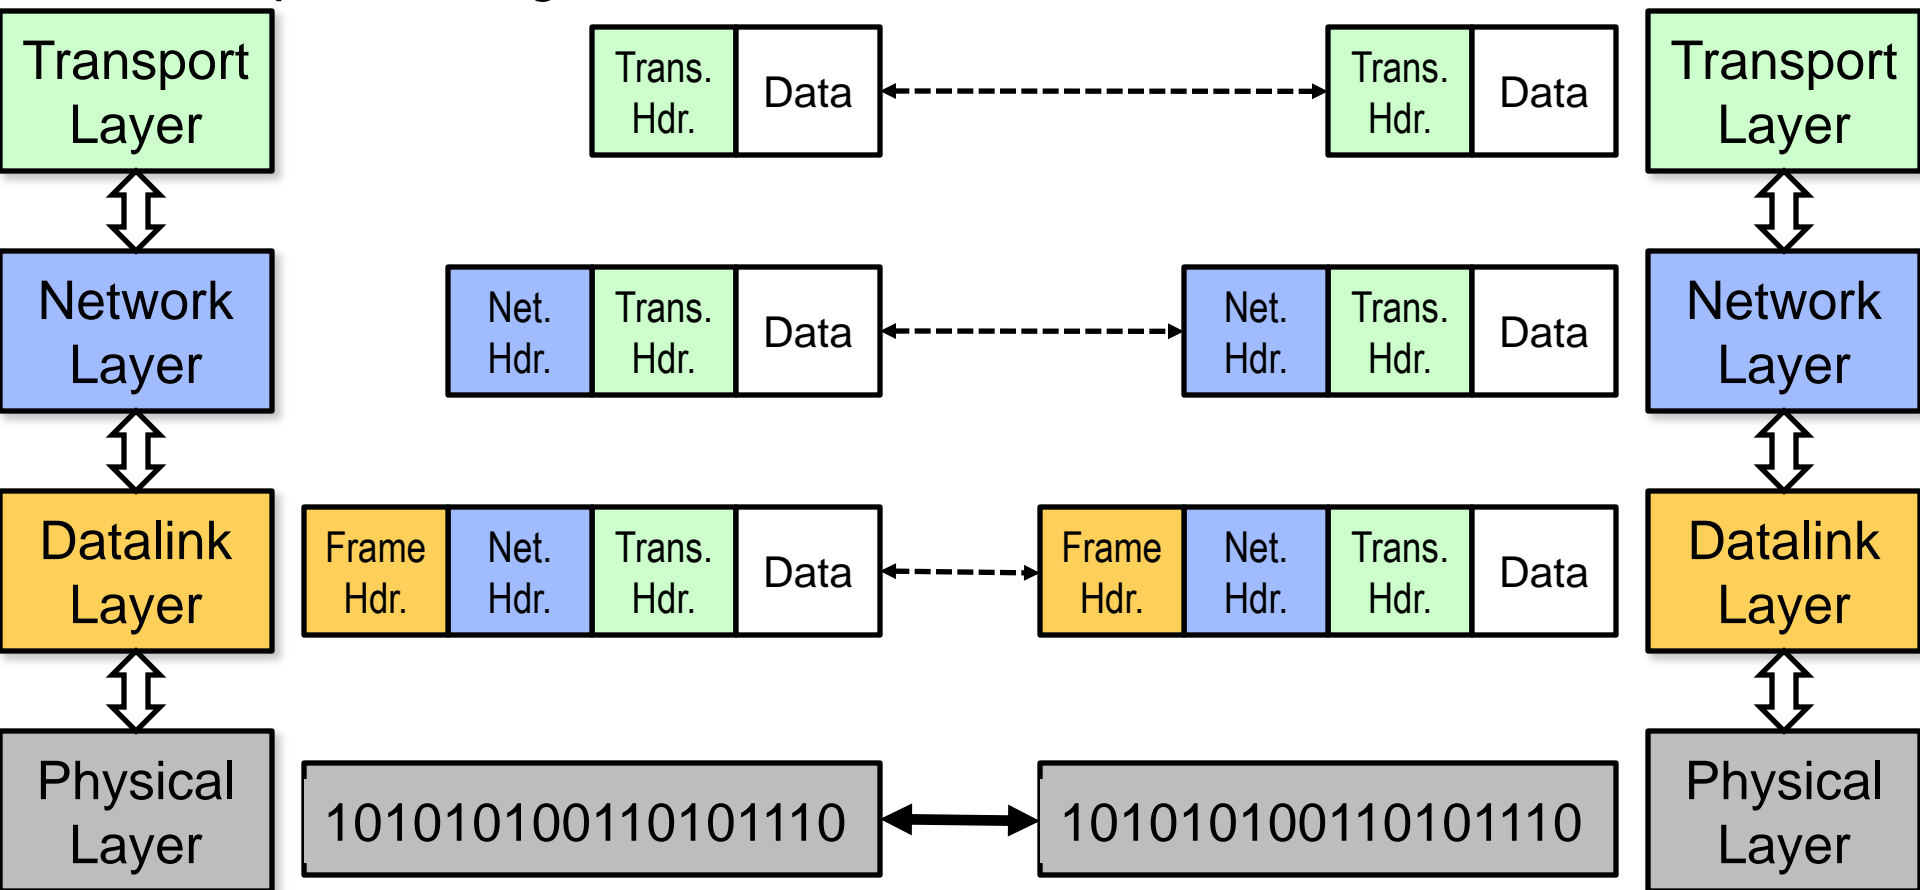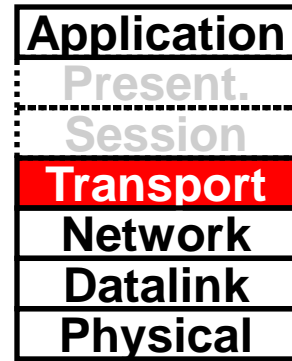

Internet Transport Protocols

Application
Present. Session
Transport
Network
Datalink
Physical


- Datagram service (**UDP**)
 - No-frills extension of “best-effort” IP
 - Multiplexing/Demultiplexing among processes
- Reliable, in-order delivery (**TCP**)
 - Connection set-up & tear-down
 - Discarding corrupted packets (segments)
 - Retransmission of lost packets (segments)
 - Flow control
 - Congestion control
- Services **not available**
 - Delay and/or bandwidth guarantees
 - Sessions that survive change-of-IP-address

Application Layer (7 - not 5!)




- **Service:** any service provided to the end user
- **Interface:** depends on the application
- **Protocol:** depends on the application
- Examples: Skype, SMTP (email), HTTP (Web), Halo, BitTorrent ...
- What happened to layers 5 & 6?
 - “Session” and “Presentation” layers
 - Part of **OSI** architecture, but not Internet architecture
 - Their functionality is provided by application layer

Application Layer (5)

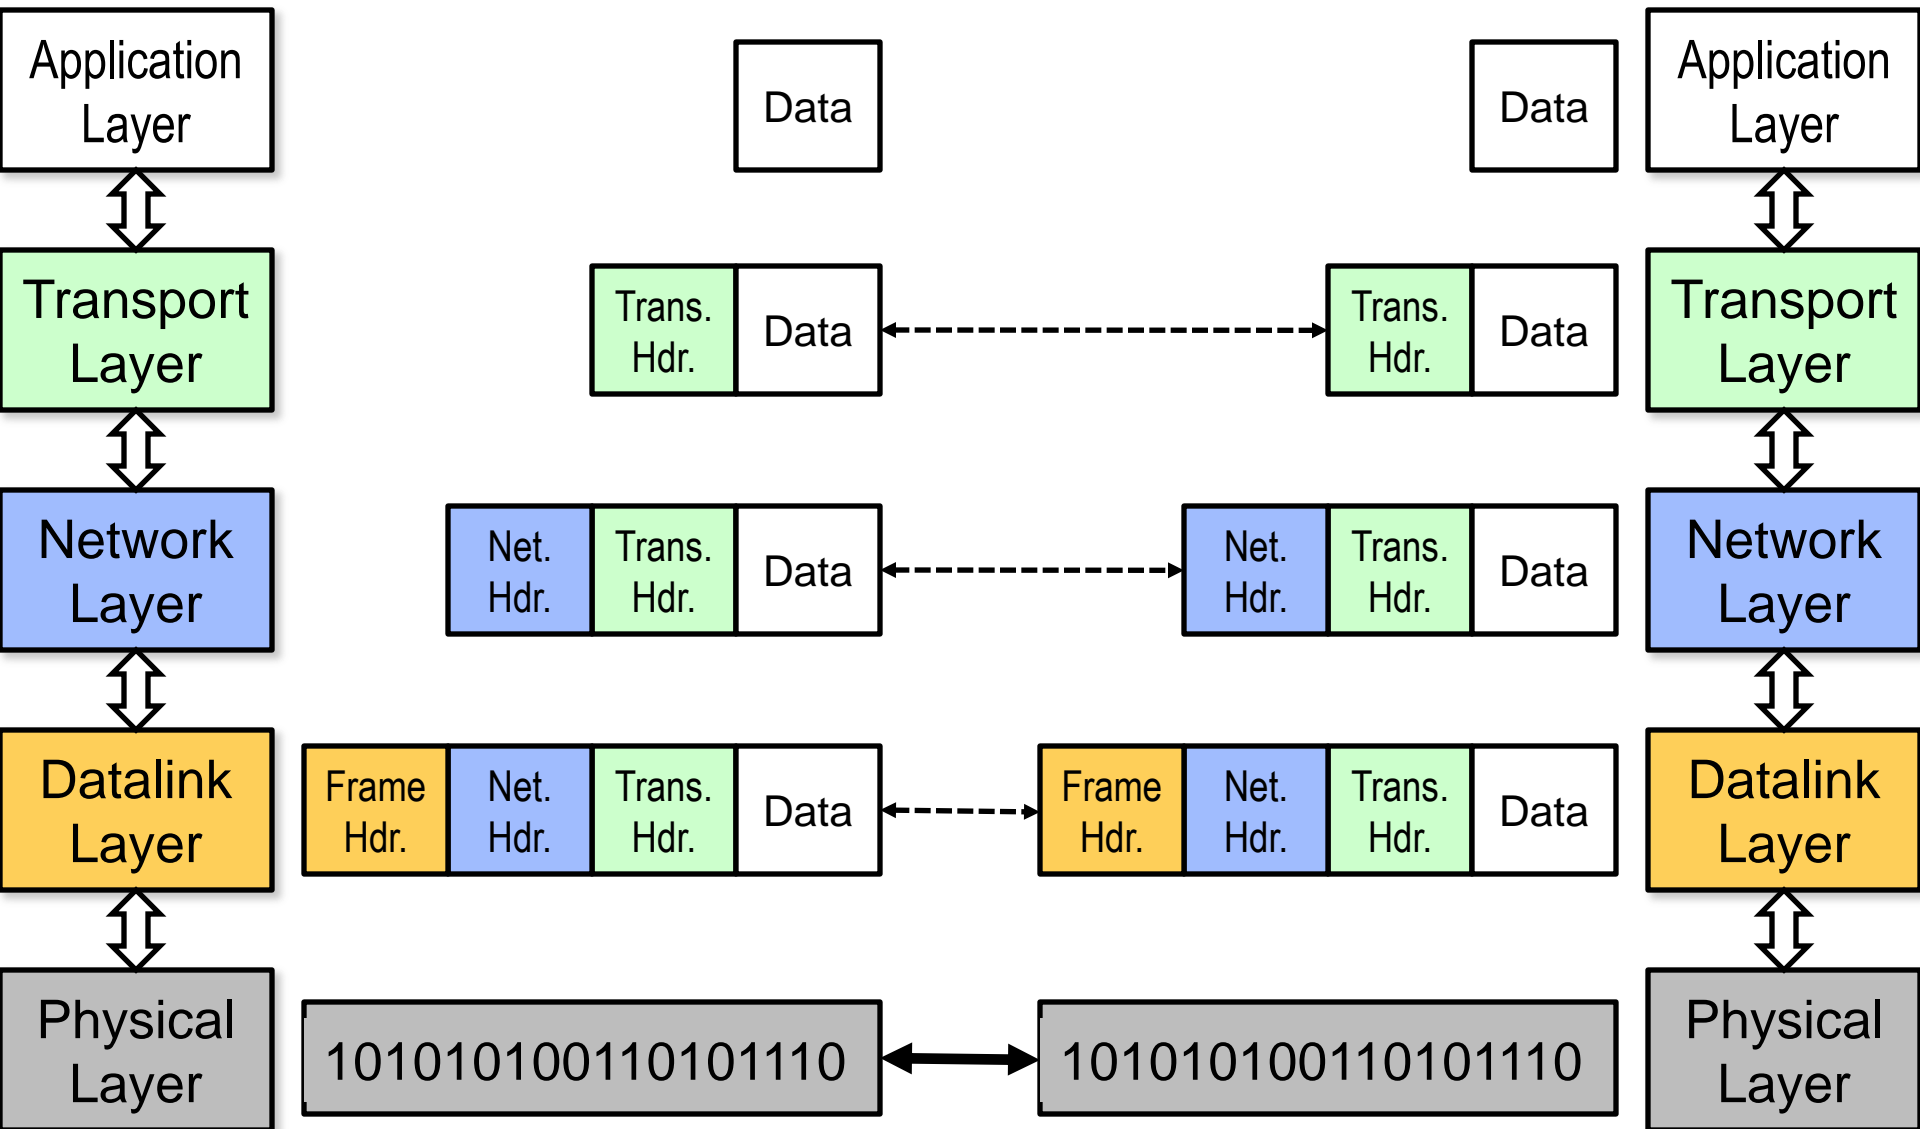


Five Layers Summary

- Lower three layers implemented everywhere
- Top two layers implemented only at hosts
- Logically, layers interact with peer's corresponding layer

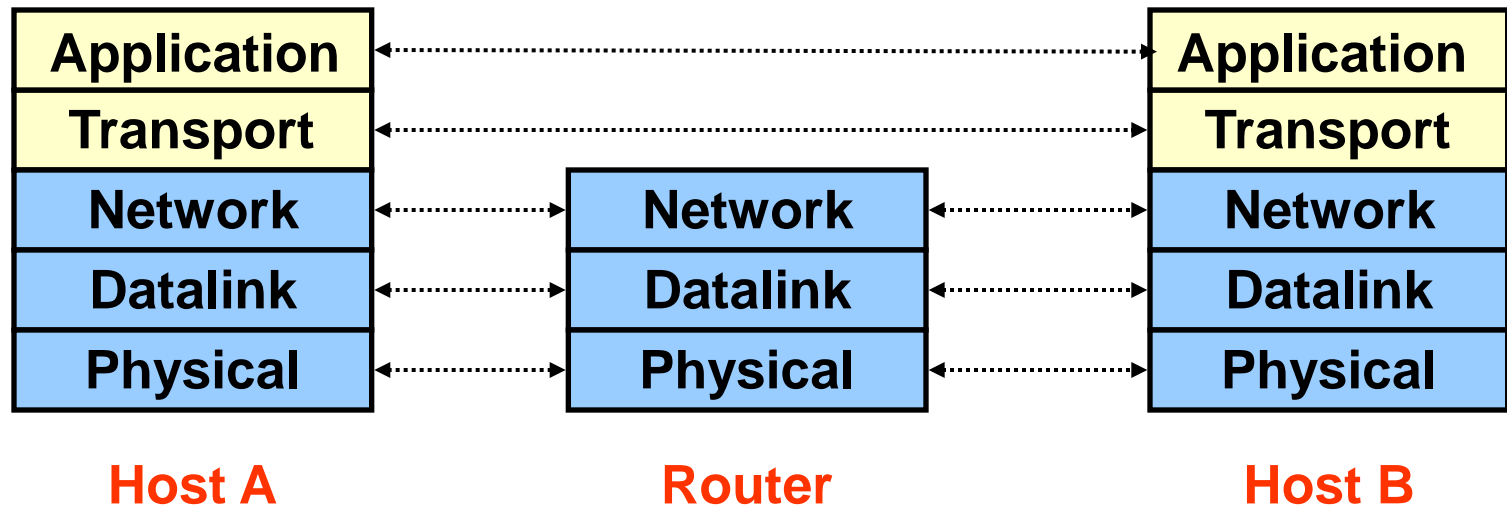


Physical Communication

- Communication goes down to physical network
- Then from network peer to peer
- Then up to relevant layer

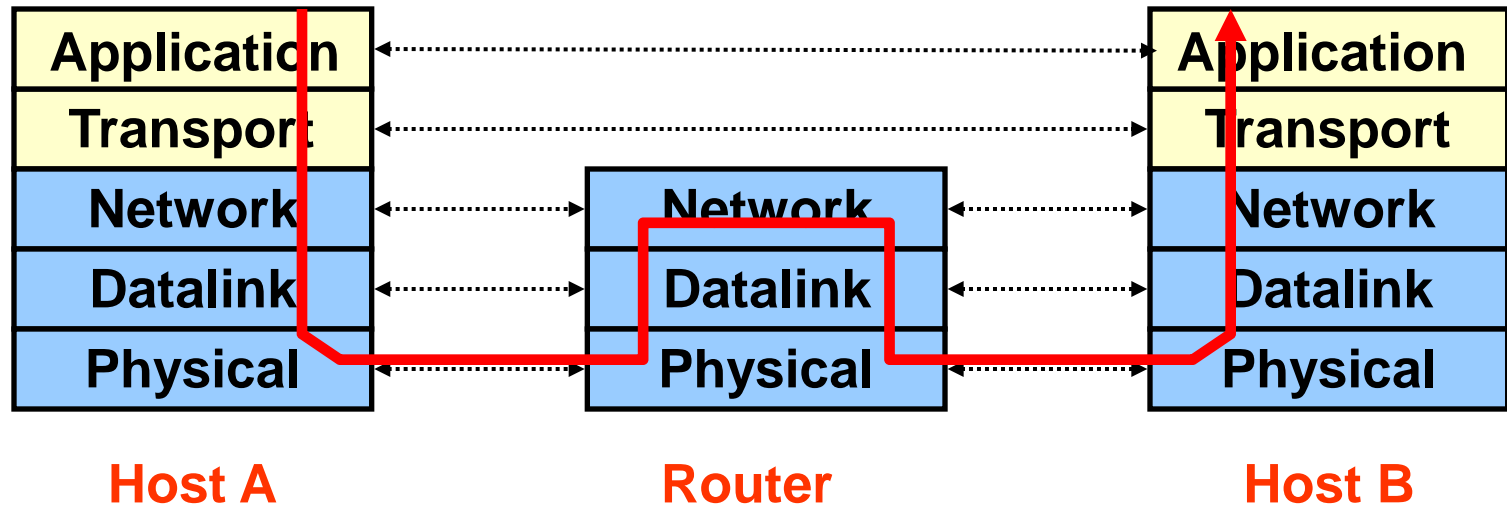

The Internet *Hourglass*

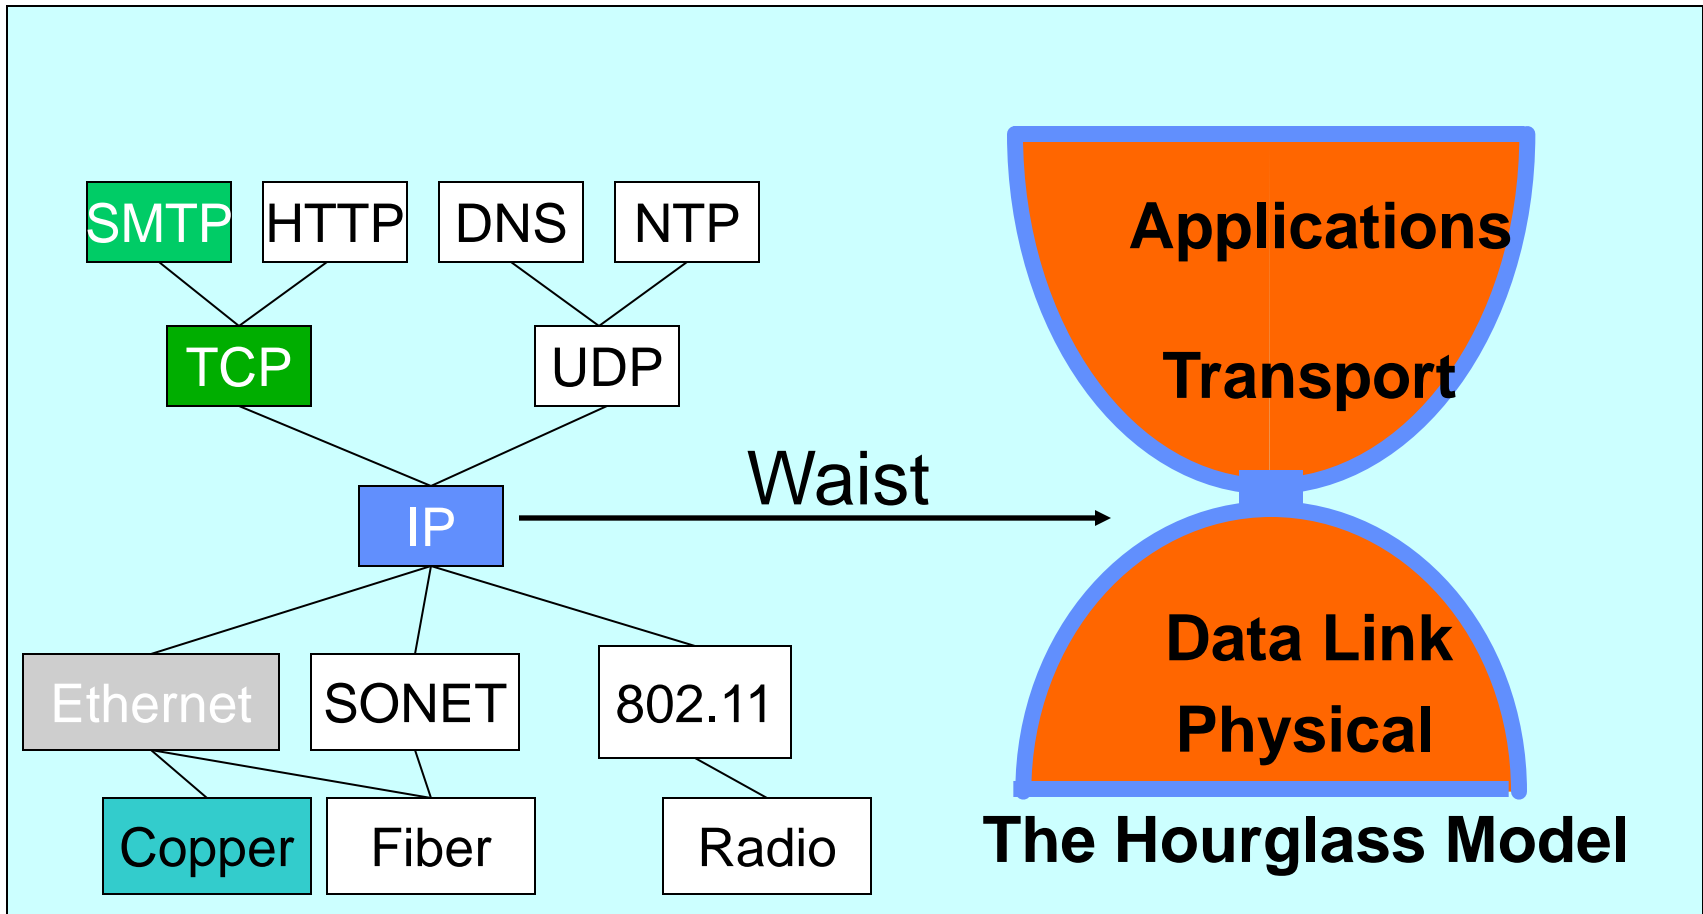

There is just **one** network-layer protocol, **IP**
The “narrow waist” facilitates **interoperability**

Implications of Hourglass

Single Internet-layer module (**IP**):

- Allows arbitrary networks to interoperate
 - Any network technology that supports IP can exchange packets
- Allows applications to function on all networks
 - Applications that can run on IP can **use any network**
- Supports simultaneous innovations above and below IP
 - But changing IP itself, i.e., **IPv6** is very complicated and slow

Drawbacks of Layering

- Layering can hurt performance
 - E.g., hiding details about what is really going on
- Headers start to get really big
 - Sometimes header bytes >> actual content
- Layer N may duplicate layer N-1 functionality
 - E.g., error recovery to retransmit lost data
- Layers may need same information
 - E.g., timestamps, maximum transmission unit size

Quiz 16.2: Layering

- Q1: True _ False _ Layering improves application performance
- Q2: True _ False _ Routers forward a packet based on its destination address
- Q3: True _ False _ “Best Effort” packet delivery ensures that packets are delivered in order
- Q4: True _ False _ Port numbers belong to network layer
- Q5: True _ False _ The hosts on Berkeley’s campus share the same IP address prefix

Quiz 16.2: Layering

- Q1: True ☐ False ☒ Layering improves application performance
- Q2: True ☒ False ☐ Routers forward a packet based on its destination address
- Q3: True ☐ False ☒ “Best Effort” packet delivery ensures that packets are delivered in order
- Q4: True ☐ False ☒ Port numbers belong to network layer
- Q5: True ☒ False ☐ The hosts on Berkeley’s campus share the same IP address prefix

Summary

- Layered architecture powerful abstraction for organizing complex networks
- Internet: 5 layers
 - Physical: send bits
 - Datalink: Connect two hosts on same physical media
 - Network: Connect two hosts in a wide area network
 - Transport: Connect two processes on (remote) hosts
 - Applications: Enable applications running on remote hosts to interact
- Unified Internet layering (Application/Transport/Internetwork/Link/Physical) decouples apps from networking technologies