

## CS61B Lecture #33

Today's Readings: Graph Structures: *DSIJ*, Chapter 12

Last modified: Sun Nov 13 20:15:50 2011

CS61B: Lecture #33 1

## Why Graphs?

- For expressing non-hierarchically related items
- Examples:
  - Networks: pipelines, roads, assignment problems
  - Representing processes: flow charts, Markov models
  - Representing partial orderings: PERT charts, makefiles

Last modified: Sun Nov 13 20:15:50 2011

CS61B: Lecture #33 2


## Some Terminology

- A graph consists of
  - A set of *nodes* (aka *vertices*)
  - A set of *edges*: pairs of nodes.
  - Nodes with an edge between are *adjacent*.
  - Depending on problem, nodes or edges may have *labels* (or *weights*)
- Typically call node set  $V = \{v_0, \dots\}$ , and edge set  $E$ .
- If the edges have an order (first, second), they are *directed edges*, and we have a *directed graph* (*digraph*), otherwise an *undirected graph*.
- Edges are *incident* to their nodes.
- Directed edges *exit* one node and *enter* the next.
- A *cycle* is a path without repeated edges leading from a node back to itself (following arrows if directed).
- A graph is *cyclic* if it has a cycle, else *acyclic*. Abbreviation: Directed Acyclic Graph—*DAG*.

Last modified: Sun Nov 13 20:15:50 2011

CS61B: Lecture #33 3

## Some Pictures

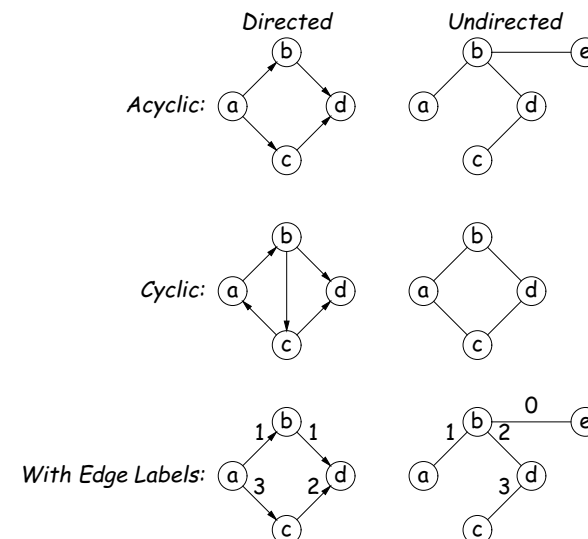


Last modified: Sun Nov 13 20:15:50 2011

CS61B: Lecture #33 4

## Trees are Graphs

- A graph is *connected* if there is a (possibly directed) path between every pair of nodes.
- That is, if one node of the pair is *reachable* from the other.
- A DAG is a (rooted) tree iff connected, and every node but the root has exactly one parent.
- A connected, acyclic, undirected graph is also called a *free tree*. Free: we're free to pick the root; e.g.,

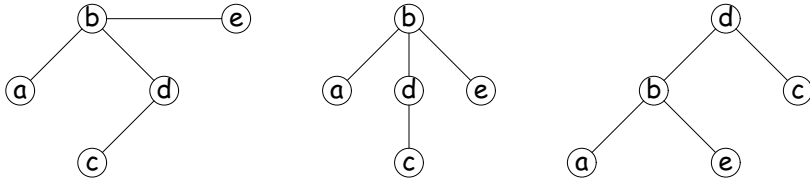

Last modified: Sun Nov 13 20:15:50 2011

CS61B: Lecture #33 5

## Examples of Use

- Edge = Connecting road, with length.
- Edge = Must be completed before; Node label = time to complete.


- Edge = Begat

Last modified: Sun Nov 13 20:15:50 2011


CS61B: Lecture #33 6

## More Examples


- Edge = some relationship



- Edge = next state might be (with probability)



- Edge = next state in state machine, label is triggering input. (Start at s. Being in state 4 means "there is a substring '001' somewhere in the input".)

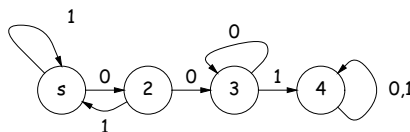


Last modified: Sun Nov 13 20:15:50 2011

CS61B: Lecture #33 7

## Representation

- Often useful to number the nodes, and use the numbers in edges.
- *Edge list representation*: each node contains some kind of list (e.g., linked list or array) of its successors (and possibly predecessors).



- *Edge sets*: Collection of all edges. For graph above:

$\{(1, 2), (1, 3), (2, 3)\}$

- *Adjacency matrix*: Represent connection with matrix entry:


	1	2	3
1	0	1	1
2	0	0	1
3	0	0	0

Last modified: Sun Nov 13 20:15:50 2011

CS61B: Lecture #33 8

## Traversing a Graph

- Many algorithms on graphs depend on traversing all or some nodes.
- Can't quite use recursion because of cycles.
- Even in acyclic graphs, can get combinatorial explosions:

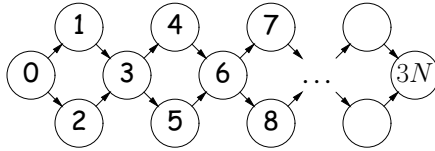

Treat 0 as the root and do recursive traversal down the two edges out of each node:  $\Theta(2^N)$  operations!

- So typically try to visit each node constant # of times (e.g., once).

## General Graph Traversal Algorithm

```

COLLECTION_OF_VERTICES fringe;

fringe = INITIAL_COLLECTION;
while (! fringe.isEmpty()) {
    Vertex v = fringe.REMOVE_HIGHEST_PRIORITY_ITEM();

    if (! MARKED(v)) {
        MARK(v);
        VISIT(v);
        For each edge (v,w) {
            if (NEEDS_PROCESSING(w))
                Add w to fringe;
        }
    }
}

```

Replace *COLLECTION\_OF\_VERTICES*, *INITIAL\_COLLECTION*, etc. with various types, expressions, or methods to different graph algorithms.

## Example: Depth-First Traversal

**Problem:** Visit every node reachable from  $v$  once, visiting nodes further from start first.


```
Stack<Vertex> fringe;
```

```
fringe = stack containing {v};
while (! fringe.isEmpty()) {
    Vertex v = fringe.pop ();
```

```
    if (! marked(v)) {
        mark(v);
        VISIT(v);
        For each edge (v,w) {
            if (! marked(w))
                fringe.push (w);
        }
    }
}

```


## Depth-First Traversal Illustrated

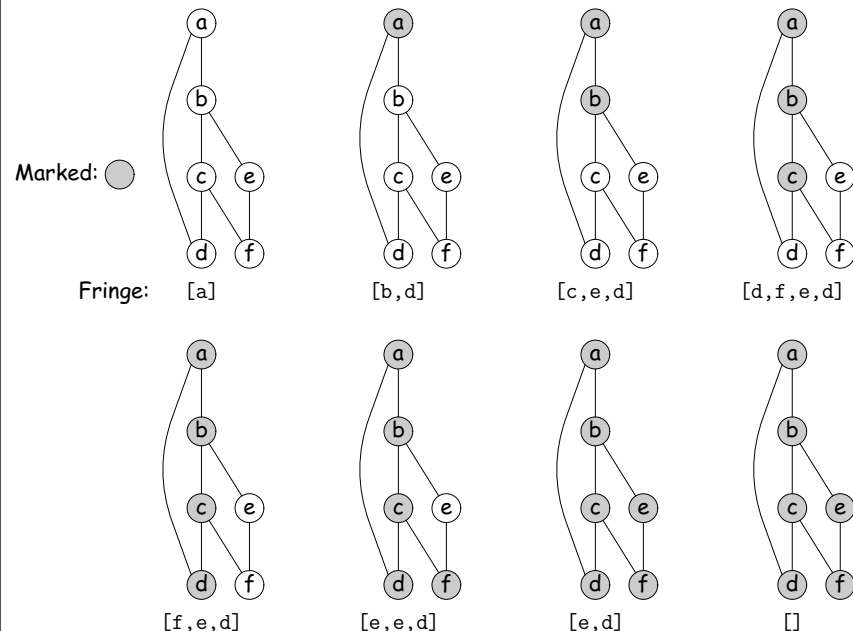

## Topological Sorting

**Problem:** Given a DAG, find a linear order of nodes consistent with the edges.

- That is, order the nodes  $v_0, v_1, \dots$  such that  $v_k$  is never reachable from  $v_{k'}$  if  $k' > k$ .
- Make does this. Also PERT charts.




$[A, B, C, F, D, G, E, H]$ , or  
 $[A, C, B, D, F, E, G, H]$ , or  
 $[A, B, C, F, D, E, H, G]$ , or  
 $\vdots$

```

Set<Vertex> fringe;
fringe = set of all nodes with no predecessors;
while (! fringe.isEmpty()) {
    Vertex v = fringe.removeOne ();
    add v to end of result list;
    For each edge (v,w) {
        decrease predecessor count of w;
        if (predecessor count of w == 0)
            fringe.add (w);
    }
}
    
```

## Topological Sort in Action

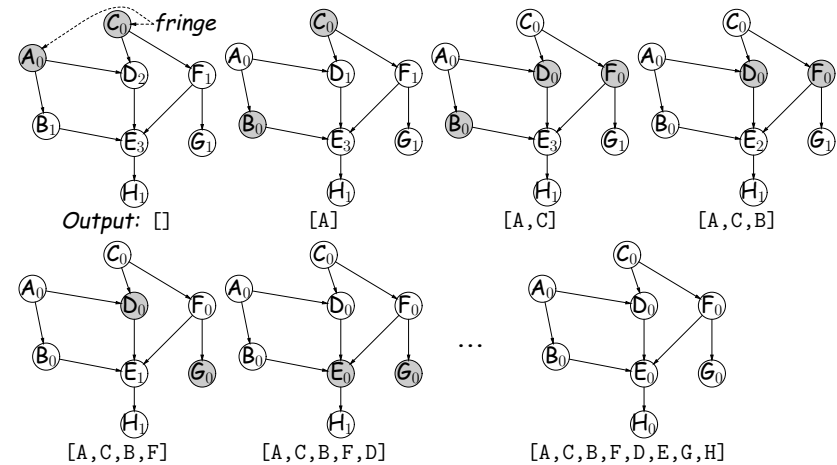

## Shortest Paths: Dijkstra's Algorithm

**Problem:** Given a graph (directed or undirected) with non-negative edge weights, compute shortest paths from given source node,  $s$ , to all nodes.

- "Shortest" = sum of weights along path is smallest.
- For each node, keep estimated distance from  $s$ , ...
- ... and of preceding node in shortest path from  $s$ .

```

PriorityQueue<Vertex> fringe;
For each node v { v.dist() = ∞; v.back() = null; }
s.dist() = 0;
fringe = priority queue ordered by smallest .dist();
add all vertices to fringe;
while (! fringe.isEmpty()) {
    Vertex v = fringe.removeFirst ();

    For each edge (v,w) {
        if (v.dist() + weight(v,w) < w.dist())
            { w.dist() = v.dist() + weight(v,w); w.back() = v; }
    }
}
    
```

## Example

